
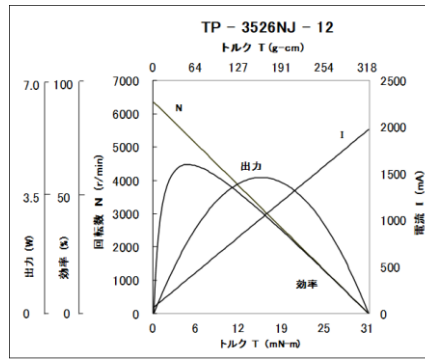
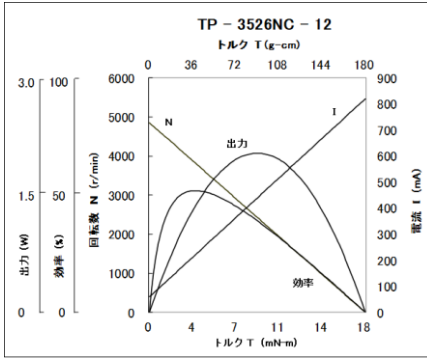
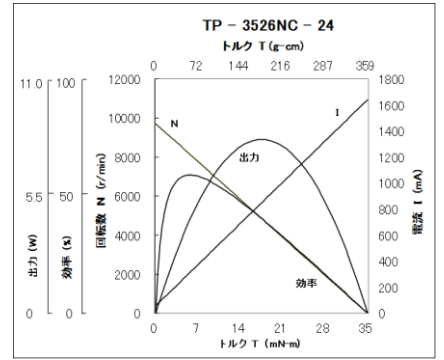
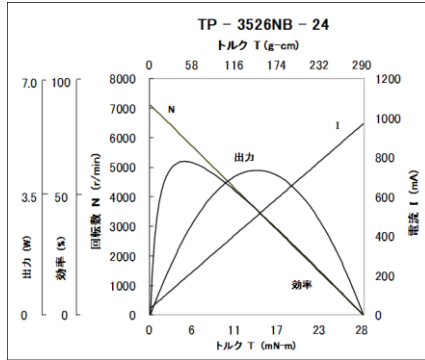
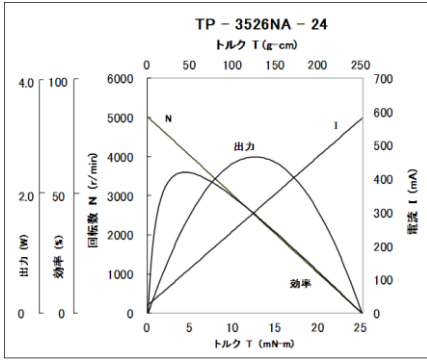

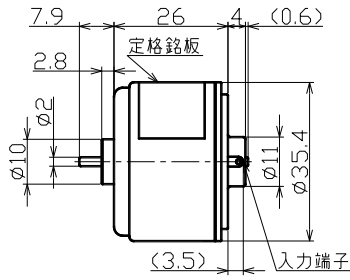


TP-3526Nシリーズ



MOTOR ϕ 35.4mm RoHS 対応品 ドライバ TPDR-68A 絶縁階級 E種 極数: 2 スロット数: 3

機種名 TP-	電圧 [V]	無負荷		定格				起動(停動)				回転方向 +端子 +印加	ブラシ	ノイズ素子	
		回転数 r/min	電流 mA	出力 W	トルク		回転数 r/min	電流 mA	トルク		電流 mA				
					mN-m	gf·cm			mN-m	gf·cm					
3526N	24	A	5000	25	1.9	4.41	45	4100	125	24.5	250	581	CCW	カーボン	バリスタ
		B	7100	35	2.8			6000	180	28.4	290	971			
		C	9700	60	4.3	4.9	50	8350	280	35	359	1641			
	12	C	4850	60	1.4	3.43	35	3905	208	17.6	180	820			
		J	6350	70	2.3	3.92	40	5550	310	31.2	318	1975			