


コアレスモータ *遊星ギア φ16* UGシリーズ

TP-1640※-UG-□□□-A***-△△

■ 外観図

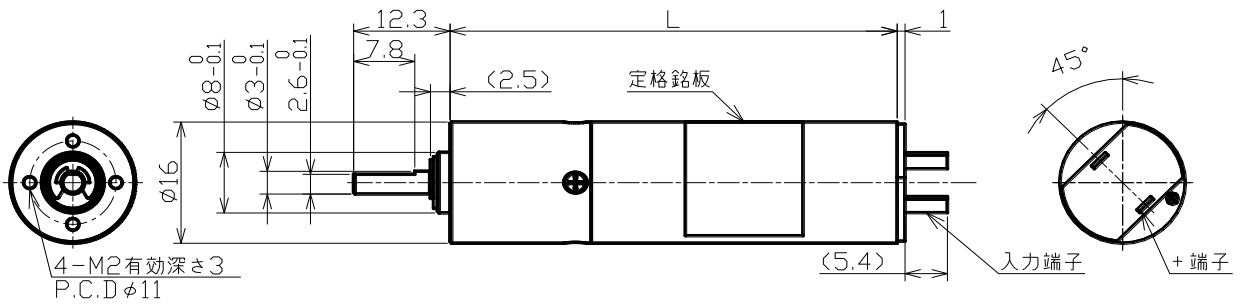

■ モータ仕様

機種名 Model name	電圧 Voltage	無負荷(No-load)		定格(Rated)				起動(Starting)				
		回転数	電流	出力	トルク		回転数	電流	トルク	電流		
		Speed	Current	Output	Torque		Speed	Current	Torque	Current		
TP-1620	※ A	6.0	14,800	19.0	1.1	0.77	7.86	13,377	77.0	8.0	81.6	1.68
TP-1625	A	12.0	8,530	7.0	0.7	0.91	9.29	7,787	73.0	1.6	16.2	0.77
TP-1630	C	6.0	21,630	70.0	5.5	2.70	27.55	19,381	603.0	5.2	53.1	5.22
TP-1630	D	12.0	9,783	10.0	1.0	1.09	11.10	8,965	110.0	4.1	42.0	1.20
TP-1640	E	12.0	8,890	28.0	1.9	2.27	23.16	7,824	200.0	19.0	193.9	1.51
TP-1640	F	24.0	15,000	17.0	6.3	4.26	43.47	14,095	265.0	70.5	719.4	4.12

■ TP-1640E-UG-□□□-A***-6

減速比 Ratio	無負荷(No-load)			定格(Rated)				起動(Starting)		方向 +印加	長さ Length	
	回転数	電流	出力	トルク		回転数	電流	トルク	電流			
	Speed	Current	Output	Torque		Speed	Current	Torque	Current			
1/**	r/min	mA	W	mNm	gf·cm	r/min	mA	Nm	kgf·cm	A	mm	
6	1,452.0	28.0	1.3	9.8	100	1,313.0	166.0	0.10	1.0	1.5	CW	41.5
16	544.5	28.0	1.5	29.4	300	479.3	200.0	0.25	2.5	1.5	CW	44.8
36	242.0	28.0	1.3	58.8	600	216.2	181.0	0.55	5.6	1.5	CW	44.8
96	90.8	28.0	1.3	156.8	1600	80.0	198.0	1.33	13.5	1.5	CW	48.1
216	40.3	28.0	1.3	343.0	3500	35.7	193.0	2.99	30.5	1.5	CW	48.1
384	22.7	28.0	1.0	490.0	5000	20.4	175.0	4.80	49.0	1.5	CW	51.4
576	15.1	28.0	0.7	490.0	5000	14.1	126.0	7.20	73.4	1.5	CW	51.4
864	10.1	28.0	0.5	490.0	5000	9.6	93.0	10.79	110.1	1.5	CW	51.4

■ TP-1640F-UG-□□□-A***-12

減速比 Ratio	無負荷(No-load)			定格(Rated)				起動(Starting)		方向 +印加	長さ Length	
	回転数	電流	出力	トルク		回転数	電流	トルク	電流			
	Speed	Current	Output	Torque		Speed	Current	Torque	Current			
1/**	r/min	mA	W	mNm	gf·cm	r/min	mA	Nm	kgf·cm	A	mm	
6	2,450.0	17.0	4.8	19.6	200	2,324.0	228.0	0.38	3.9	4.1	CW	41.5
16	918.8	17.0	4.5	49.0	500	869.6	237.0	0.92	9.3	4.1	CW	44.8
36	408.3	17.0	4.7	117.6	1200	385.0	252.0	2.06	21.0	4.1	CW	44.8
96	153.1	17.0	4.4	294.0	3000	144.0	261.0	4.95	50.5	4.1	CW	48.1
216	68.1	17.0	2.4	343.0	3500	66.0	144.0	11.13	113.6	4.1	CW	48.1
384	38.3	17.0	1.9	490.0	5000	37.2	130.0	17.89	182.6	4.1	CW	51.4
576	25.5	17.0	1.3	490.0	5000	25.1	92.0	26.84	273.9	4.1	CW	51.4
864	17.0	17.0	0.9	490.0	5000	16.8	67.0	40.26	410.9	4.1	CW	51.4